


U - Stahl DIN EN 10 279 / DIN 1026

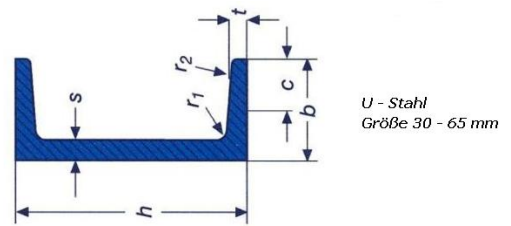

HG	Abmessungen in mm					F	Jx-x	Wx-x	ix-x	Jy-y	Wy-y	iy-y
kg/m	h	b	s	t	r2	cm <sup>2</sup>	cm <sup>4</sup>	cm <sup>3</sup>	cm	cm <sup>4</sup>	cm <sup>3</sup>	cm
4,4	30	33	5,0	7,0	3,5	5,44	6,39	4,26	1,08	5,33	2,68	0,99
3,0	40	20	5,0	5,5	2,5	3,66	7,58	3,79	1,44	1,14	0,86	0,56
5,0	40	35	5,0	7,0	3,5	6,21	14,10	7,05	1,50	6,68	3,08	1,04
4,0	50	25	5,0	6,0	3,0	4,92	16,80	6,73	1,85	2,49	1,48	0,71
5,8	50	38	5,0	7,0	3,5	7,12	26,40	10,60	1,92	9,12	3,75	1,13
5,2	60	30	6,0	6,0	3,0	6,46	31,60	10,50	2,21	4,51	2,16	0,84
7,3	65	42	5,5	7,5	4,0	9,03	57,50	17,70	2,52	14,10	5,07	1,25